

DAMTEC® wave 3D is a mat with granules of foamed polyurethane with profile for impact sound insulation and for absorption of vibrations and structure borne noise. It can be used for different applications like under floating screed or under machine foundations.

Product design

Material: high-grade granules of polyurethane foam with PU elastomer bonding agent.

Colour sample:



DAMTEC wave 3D

Colour: beige/brown

(Change in colour due to sunlight. This has no influence on quality and technical values given below)

Surface: granular texture

Lower side: profiled

Dimensions / Tolerances / Weight

Roll width: 1,250 mm ($\pm 1.5\%$)

Roll length: 8,000 mm ($\pm 1.5\%$)

Thickness: 8/4 mm (± 1.0 mm)
17/8 mm (± 1.0 mm)

Area weight: 1.50 - 2.80 kg/m² (8/4)
3.45 - 5.40 kg/m² (17/8)

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/damtec



15
KRAIBURG Relastec
GmbH & Co. KG
Fuchsberger Straße 4
29410 Salzwedel /
Germany
ETA-15/0358

page 1 of 4

Product Testing

Tensile strength:	(EN ISO 1798) 0.15 - 0.55 N/mm ²
Elongation at break:	(EN ISO 1798) 30 - 70 %
Density:	300 - 400 kg/m ³
Temperature range:	-30° to 80°C
Heat transmission coefficient:	(EN 12667) 0.275 m ² K/W (17/8)
Flammability rating:	(EN 13501-1) E _{fl}
Compressive stress:	(DIN EN 826) > 5 kPa
Compressibility:	(DIN EN 12431) < 2 mm (17/8) < 1 mm (8/4)
Dynamic stiffness:	(EN 29052) < 7 MN/m ³ (17/8) < 18 MN/m ³ (8/4)
Maximum pressure:	(EN 826) 0.03 N/mm ²
Impact sound improvement:	(ISO 140-8) $\Delta L_w = 35$ dB, 17/8 - 80mm screed $\Delta L_w = 32$ dB, 17/8 - 50mm screed $\Delta L_w = 30$ dB, 8/4 - 80mm screed $\Delta L_w = 25$ dB, 8/4 - 50mm screed

VOC Emissions:



Emissions:

fulfils the requirements of AgBB scheme



15
KRAIBURG Relastec
GmbH & Co. KG
Fuchsberger Straße 4
29410 Salzwedel /
Germany
ETA-15/0358

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/damtec

page 2 of 4

Installation

Installation is to be carried out in accordance with the **DAMTEC® wave 3D** installation instructions.

Other

Disclaimer:

The information provided is intended only as a summary and general overview on matters of interest. The information is not intended to be comprehensive nor does it constitute expert advice. KRAIBURG RELASTEC shall not be liable for incidental and/or consequential damages directly or indirectly sustained, nor any loss caused by not complying with relevant industry/product standards and improper use of any Damtec® products. Due to varying construction methods, any other circumstances not stated above should be brought to the attention of KRAIBURG RELASTEC for review. For suitability to the prevailing site conditions, it is advised that certified testing should be conducted. It is recommended to seek further advice on your application with our technical staff prior to use.



15
KRAIBURG Relastec
GmbH & Co. KG
Fuchsberger Straße 4
29410 Salzwedel /
Germany
ETA-15/0358


The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/damtec


page 3 of 4

Measurement diagrams

Spring Characteristic:

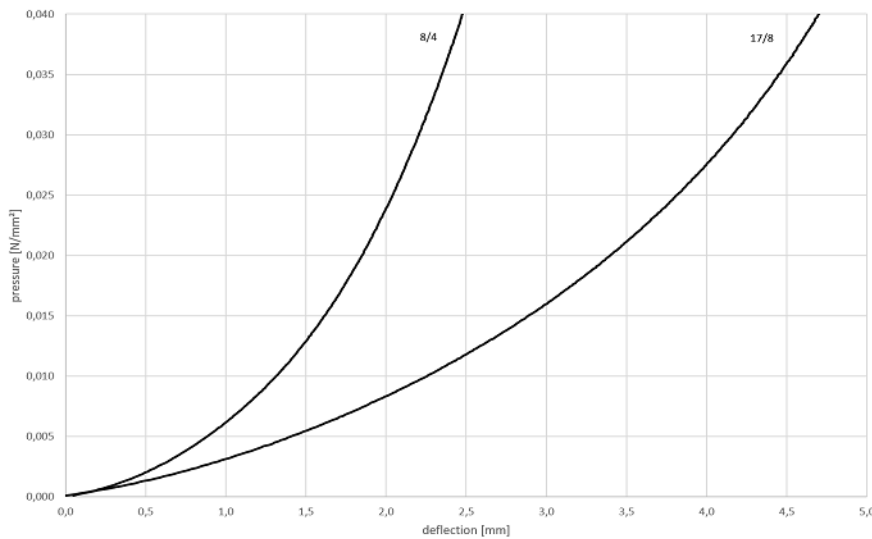

bedding modulus:

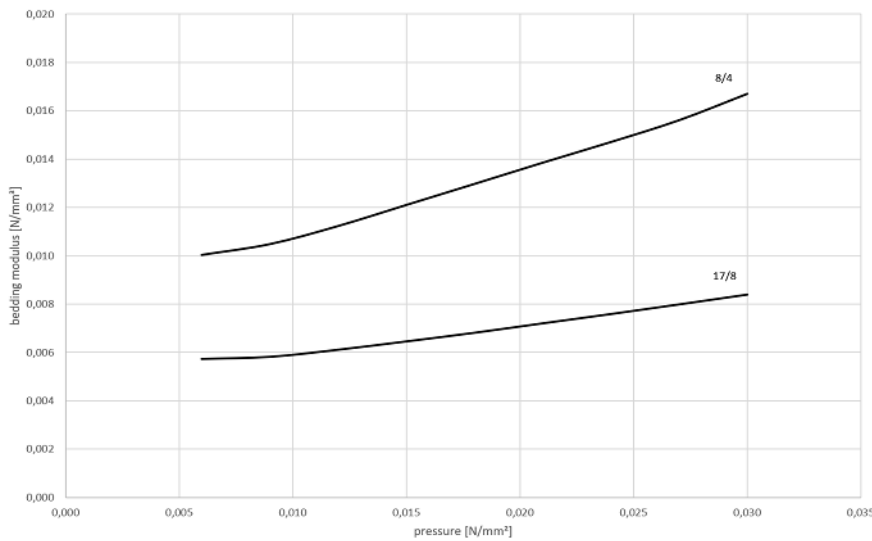

15
KRAIBURG Relastec
GmbH & Co. KG
Fuchsbberger Straße 4
29410 Salzwedel /
Germany
ETA-15/0358

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/damtec

page 4 of 4